


# SMT Power Inductor


## HCB0740A Type

### Features

- RoHS compliant.
- Low profile, SMD type.
- High current.
- Magnetic shielded.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor applications.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.

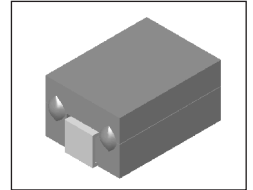

### Mechanical Dimension :

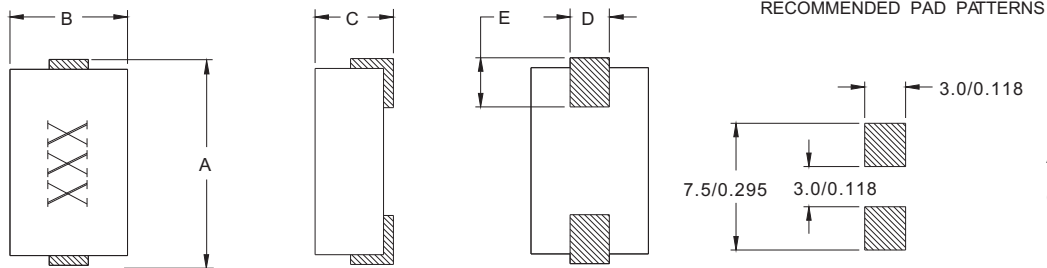

UNIT : mm/inch  
 A = 7.00 / 0.276 Max.  
 B = 7.00 / 0.276 Max.  
 C = 4.00 / 0.157 Max.  
 D = 2.50 / 0.098  
 E = 1.50 / 0.079

### Electrical Characteristics : At 25°C: 100KHz, 1V

PART NO.	$L_o^1$ (nH)	$L_i$ (nH)	DCR (mΩ) MAX	$I_{sat}^2$ (A dc)	$I_{rms}^3$ (A dc)
HCB0740A-101	100	80	0.40	35	37
HCB0740A-151	150	96	0.40	23	37
HCB0740A-201	200	160	0.40	15	37
HCB0740A-471	470	376	0.40	10	37

1. Tolerance of inductance is  $\pm 20\%$ .
2.  $I_{sat}$  is the DC current which cause the inductance drop not lower than  $L_i$ .
3.  $I_{rms}$  is the DC current which cause the surface temperature of the part increase less than 45°C.
4. Operating temperature : -20°C to 105°C ( including self-temperature rise ).



**DELTA ELECTRONICS, INC.**

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.

TEL: 886-3-3591968; FAX: 886-3-3591991

<http://www.deltaww.com>